


Connekt Smart Board



Installation and User Manual

Introduction

A Wi-Fi **Smart Board** integrating APP remote control, voice control, timer and other functions. You can control your home appliances anytime, anywhere, and also create a variety of smart scenes to facilitate your life.



Remote Control



Voice Control



Timer Schedule



LAN Control

Description

Connekt Smart Board is a part of the **Connekt Smart Modular System**. Other components listed in this manual are sold separately.

This **Connekt Smart Board** is compatible with the **Connekt Smart Virtual Switch** and **Connekt Smart Socket**, which is an optional component of the system.

This **Connekt Smart Board** is compatible with **Smart** modules from the **Connekt Modular System** series of products.

The **Connekt Smart Board** is an integral part of the **Connekt Smart Modular System**, allowing other components to communicate with the remote server and the user interface application, depending on the user's selection of accompanying components and modules.

NOTE: This **Smart Board** is not compatible with the **Connekt Regular System!**

NOTE: All components of the selected system should be fully assembled before use. Refer to the individual installation and user manuals for each component for more information.

NOTE: For additional instructions, resources and support visit the website at this link:

<https://connektworld.com/SmartBoard>

Technical Specification

Product name	Connekt Smart Board
Dimensions	48.5 mm x 22.8 mm x 30.9 mm
Rated input voltage / frequency	100 – 240 V a.c., 50 / 60 Hz
Operating temperature range	0 – 40 °C
Operating relative humidity range	20 – 60 RH %
Ingress protection rating	IP21
Wireless communication frequency range	2,4 GHz
Wireless protocols	WiFi: IEEE 802.11b/g/n

Additional tools required (not included)

- PH2 Philips head screwdriver
- Flat head screwdriver

Contents of the box


1 x Connekt Smart Board
1 x User Manual

Installation instructions

IMPORTANT: Make sure the power breaker / fuse is flipped and no hazardous voltages are present at the installation point before proceeding.

1. Connect AC power wires to the **Connekt Smart Board** according to the schematic shown above, following the markings for live and neutral. Connect AC power wires to any modules that require it, referring to the individual user manual of each module used.

IMPORTANT: Make sure the wires are adequately inserted and terminal screws are properly tightened.

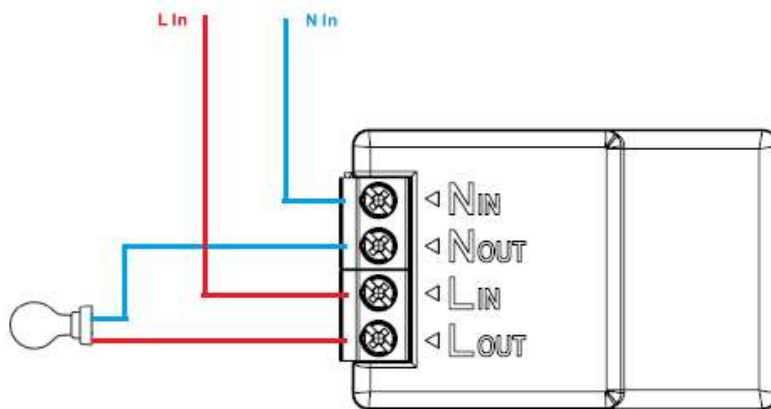

NOTE: Make sure everything is attached correctly and there are no loose wires or other hazards before proceeding.



2. Flip the circuit breaker / fuse to turn on the AC power to the system.

After completing the installation, the system will start up in Offline mode. For further steps regarding the configuration continue reading the User Configuration Instructions.



User Configuration Instructions

NOTE: Download the **Connekt Application** from the Google Play Store or Apple App Store before proceeding. Web application is also available at: <https://app.connektworld.com>

1. Open the **Connekt Application** on your phone. Select “**Add device**” in the top right hamburger menu and follow the displayed instructions.

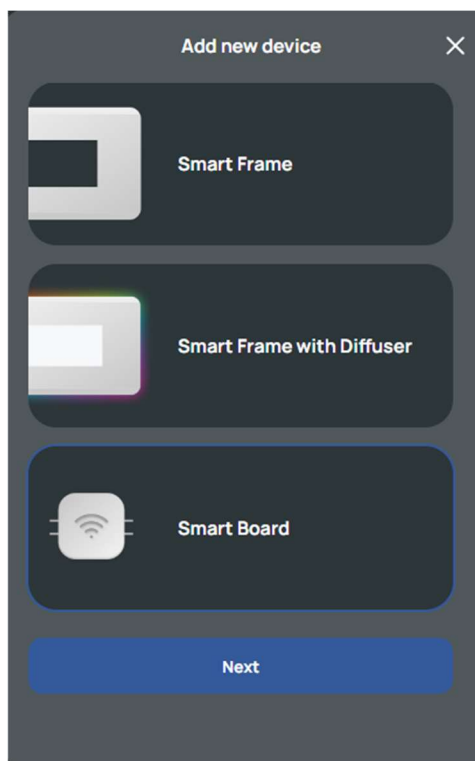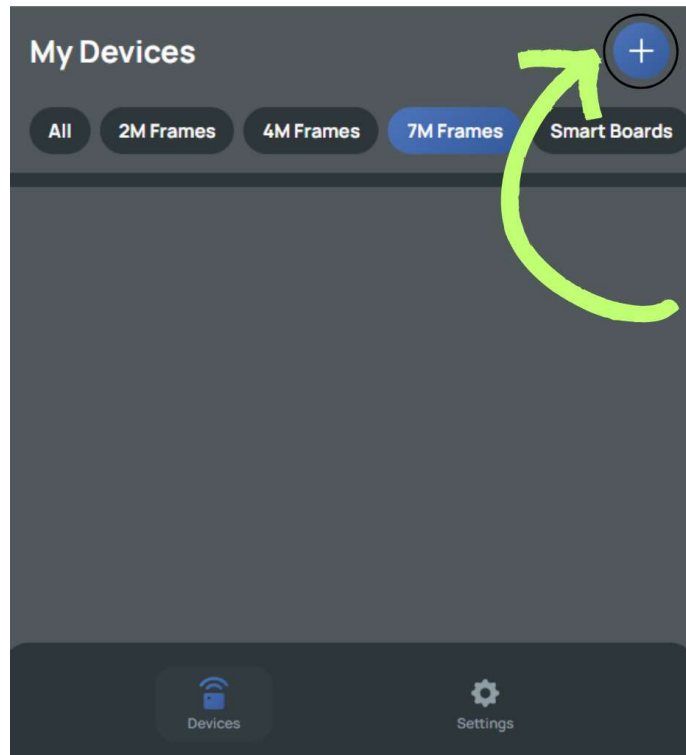

2. Put the Board into Pairing Mode. Press and hold the **Button** for at least 3 seconds until you hear the beep from the device.

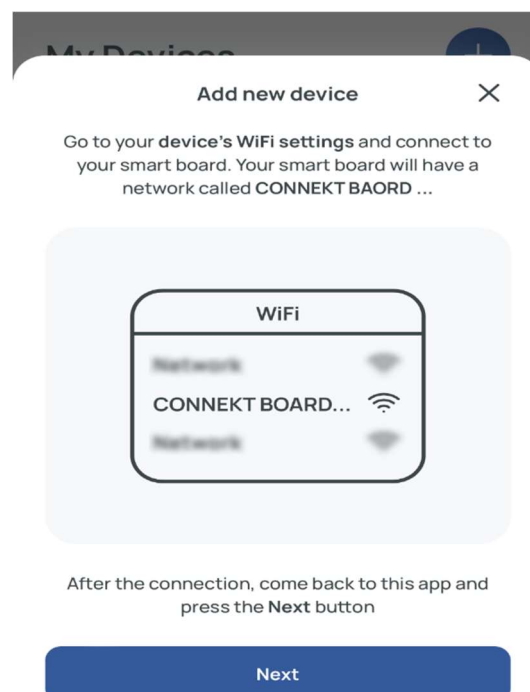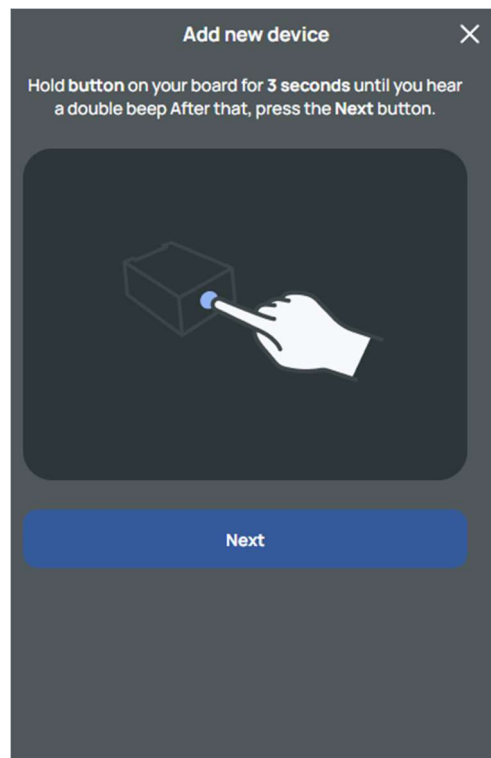

3. Upon successful connection the **Smart Board** will make a **success** sound and return to normal operation. If there was a problem, the **Smart Board** will make a **fail** sound and remain in the pairing mode allowing you to check that you entered the correct credentials or try a different network.

Normal Use

Once you have connected the system to your WiFi network you will be able to control all parameters and functions of the system via the mobile application. Many other features are available depending on your selection of modules.

Factory Reset

To perform a factory reset - press and hold the **Button** for at least 10 seconds, until you hear a confirmation sound. After a few seconds the Board will reboot in factory default mode.

Information about recycling

Disposal: After the implementation of the European Directives 2012/19/EU and 2006/66/EU in the national legal system, the following applies: Electrical and electronic devices, as well as batteries, must not be disposed of with household waste. Consumers are legally obliged to return electrical and electronic devices, as well as batteries, to public collection points or sales outlets at the end of their useful life. Details on this are defined by the national laws of the respective country. This symbol on the product, user manual, or packaging indicates that the product is subject to these regulations. By recycling, reusing materials, or using old devices/batteries in other ways, you are making an important contribution to protecting our environment.



Safety precautions

Every person intending to install and/or use must read and understand the User and Installation Instructions before any work with the device.

Awareness and understanding of the content of these instructions are essential to protect staff from any danger, prevent malfunctions and ensure safe and proper operation.

You must pay attention to all icons, signs, and labels related to the device.

The parts of Connekt Smart Modular System should not be installed, moved, disassembled, modified, or repaired by the end user.

All work described in these instructions may only be carried out by qualified, authorized personnel. Handling the device in the intended and proper way requires compliance with all instructions and information given in these User and Installation Instructions (especially safety-related instructions).

Safety Notes

- The device should be installed in accordance with regional regulations.
- The device should be connected to the installation with an adequate protective element (fuse) with a current limitation of 16 A, in accordance with the technical specifications of the device.
- Do not attempt to open, service, or repair the device yourself. Leave all service work to qualified and authorized professionals.
- Take care not to touch or otherwise damage exposed electronic components and connectors during the installation process to avoid causing malfunctions of the device.
- In case the device becomes visibly damaged, immediately stop using it.
- The device is intended for indoor use only.
- Use the device only for its intended purpose.
- Use the device only with compatible parts as specified in this manual.
- Protect the device from dirt and moisture and use it only in a dry environment.
- Do not expose the device to impacts or excessive force.

Disclaimer and Warranty Waiver

Neither Gelco Electronics Pvt. Ltd. nor Elproms Team j.d.o.o. assume any liability for damages resulting from incorrect installation or assembly, improper use of the product, or failure to comply with the instructions for use and/or safety notes.

Other Device Markings



Declaration of Conformity

Product: *Connekt Smart Board*

Manufacturer:

Gelco Electronics Pvt. Ltd.
Block No. 142, Khatraj Kadi Road, Karoli
Tal: Kalol, Dist: Gandhinagar – 382721
Gujarat, India
Contact: exports@gelco-world.com

Importer:

Elproms Team j.d.o.o.
Vladka Mačeka 5
10430 Samobor
Croatia

We, Elproms Team j.d.o.o. hereby declare that the product named ***Connekt Smart Board*** complies with all relevant provisions of the applicable European Directives and Standards. This Declaration of Conformity is issued in accordance with the requirements of the European Union.

The ***Connekt Smart Board*** has been designed and manufactured to comply with the following European Directives as a part of the ***Connekt Smart Modular System***:

- Low Voltage Directive (2014/35/EU)
- Electromagnetic Compatibility Directive (2014/30/EU)
- Radio Equipment Directive (2014/53/EU)
- Restriction of Hazardous Substances (2015/863/EU)
- Waste from Electrical and Electronic Equipment (2012/19/EU)

CE Certification: The **Connekt Smart Board** has obtained the necessary CE certifications from accredited third-party testing laboratories. The following CE markings are affixed to the product:



This Declaration of Conformity is issued under the sole responsibility of Elproms Team j.d.o.o. and remains valid as long as no significant changes are made to the product or its intended use. Any modifications or alterations to the product without our prior approval may void this Declaration of Conformity.

For more information about the declaration of conformity and accompanying documents please contact: info@elproms.com

Signed for and on behalf of:	Elproms Team j.d.o.o.
Place of Issue:	Samobor
Date of Issue:	1 st June 2023
Name:	Nedeljko Štefanić
Position:	Operation Director

Signature:

A handwritten signature in black ink, appearing to read 'N. Štefanić', is shown within a light gray rectangular box. Above the signature is a horizontal line.